

Remote Monitoring Around The Clock

SolaX Cloud Monitoring



Feature

- Local & Remote monitoring, setting and upgrade of batch inverters
- Intelligent export control, DRM control, ripple control and etc. of batch inverters
- Support large-capacity data storage
- Support IEC104 protocol



DataHub1000

DataHub

	DataHub1000
Model	DataHub1000
Power adapter	100-240V 50/60HZ 1.5A AC input 12V 2A DC output
Wireless module	Wi-Fi 2.4GHz
Ethernet	10/100M
Manage device quantity	60
Interface	RS485 x 4, CAN x 1, Ethernet x1
Dry contactor	AI x 2, DI x 4, DO x 4
Data transfer interval	5 mins
Expanded storage capacity	8G/16G TF card (Optional)
Dimensions	205 x 124 x 33 mm
Weight	410 g
degree of protection	IP 21
Operating temperature range	-20 ~ +60°C

Pocket WiFi V3.0-P



Feature

- Quick installation with "Plug & Play" function
- IP 65 dust prevention water proofing designs
- Stable data transmission and good reliability
- Offline data storage and resuming
- Multiple antenna adaptations according to the situation
- 10 second live data monitoring
- Modbus TCP support
- IEEE2030.5 support

Pocket LAN

Model	Pocket WiFi+LAN
Power Supply	5V 200mA DC
Wireless Module	WiFi 2.4 GHz
Ethernet	10/100 M
Antenna Gain	3 dBi
Data Transfer Interval	5 mins
Dimensions	112*45.7*28.5 mm
Weight	80±10 g
Degree of Protection	IP65
Operating Temperature Range	-35°C ~ +60°C

Pocket WiFi

Model	Pocket WiFi V3.0-P
Power Supply	5V 260mA DC
Wireless Module	WiFi 2.4GHz
Antenna Gain	3dBi
Data Transfer Interval	5 mins
Dimensions	112*45.7*28.5 mm
Weight	107±10g
Degree of Protection	IP65
Operating Temperature Range	-35°C ~ +60°C

Pocket WiFi+LAN




Feature

- Quick installation with "Plug & Play" function
- IP 65 dust prevention water proofing designs
- Stable data transmission and good reliability
- Offline data storage and resuming
- 10 second live data monitoring
- Modbus TCP support
- IEEE2030.5 support

Pocket WiFi+4GM

Feature

- Quick installation with "Plug & Play" function
- IP 65 dust prevention water proofing designs
- Stable data transmission and good reliability
- Offline data storage and resuming
- Multi-communication operator support
- 10 second live data monitoring
- Modbus TCP support
- IEEE2030.5 support

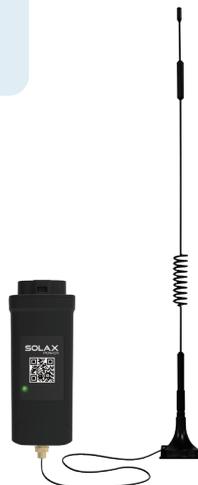

Pocket 4G

Model	Pocket WiFi+4GM
Power Supply	5V 200mA DC
Wireless Module	WiFi 2.4 GHz
Antenna Gain	3 dBi
SIM Card Size	Nano - 4FF 12.3*8.8 mm
Support Band	LTE-FDD: Cat M1: B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/ B20/B25/B26/B27/B28/B66/B85 Cat NB2: B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/ B20/B25/B28/B66/B71/B85
Data Transfer Interval	5 mins
Dimensions	112*45.7*28.5 mm
Weight	124±10 g
Degree of Protection	IP65
Operating Temperature Range	-35°C ~ +60°C