




NEW FROM SOLAX TCBOX-70

Features

- Increase the capacity of system
- Extend the working hours of ESS
- Triple-modules in case
- Convenient for capacity expansion
- Prolong the batteries life due to the alternate use of triple-module

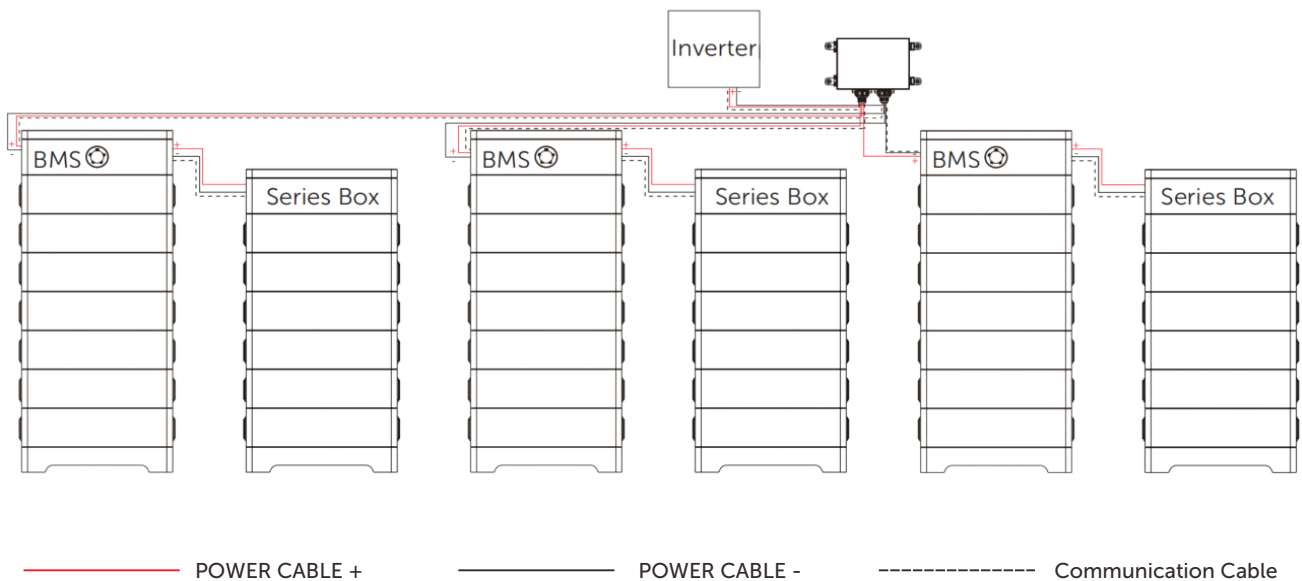

info@solaxpower.com
service@solaxpower.com



Contact Us for More Informations

www.solaxpower.com
AU: +61 1300 476529
DE: +49 6142 4091664

Global: +86 571-56260008
UK: +44 2476 586998
NL: +31 (0) 852 737932



Type/model

TCBox-70

Max. operation current [A]	70
Input & output voltage [V]	90 - 750
Communication interface	RJ45*4
Max. parallel tower	3
Available charge / discharge temperature range [°C]	-30 ~ 60
Storage temperature [°C]	-40 ~ 80
Relative humidity [%]	4 ~ 100 (condensing)
Dimension (W x H x D) [mm]	227 x 200 x 147
Weight [kg]	2.1
Installation type	Wall mounted
Protection class	IP65
Cooling type	Natural
Altitude [m]	Below 3000